

Doc. ID 571735


ACCEPTED
FOR REGISTRATION

January 19, 2021

New York State Department
of Environmental Conservation
Division of Solid & Hazardous Materials
Pesticide Product Registration



THIS PRODUCT MEETS THE AMENDED
CONSUMER PRODUCTS SAFETY
COMMISSION (CPSC) STANDARD
FOR FLAME RESISTANCE AND
CORROSIVENESS OF CELLULOSE
INSULATION

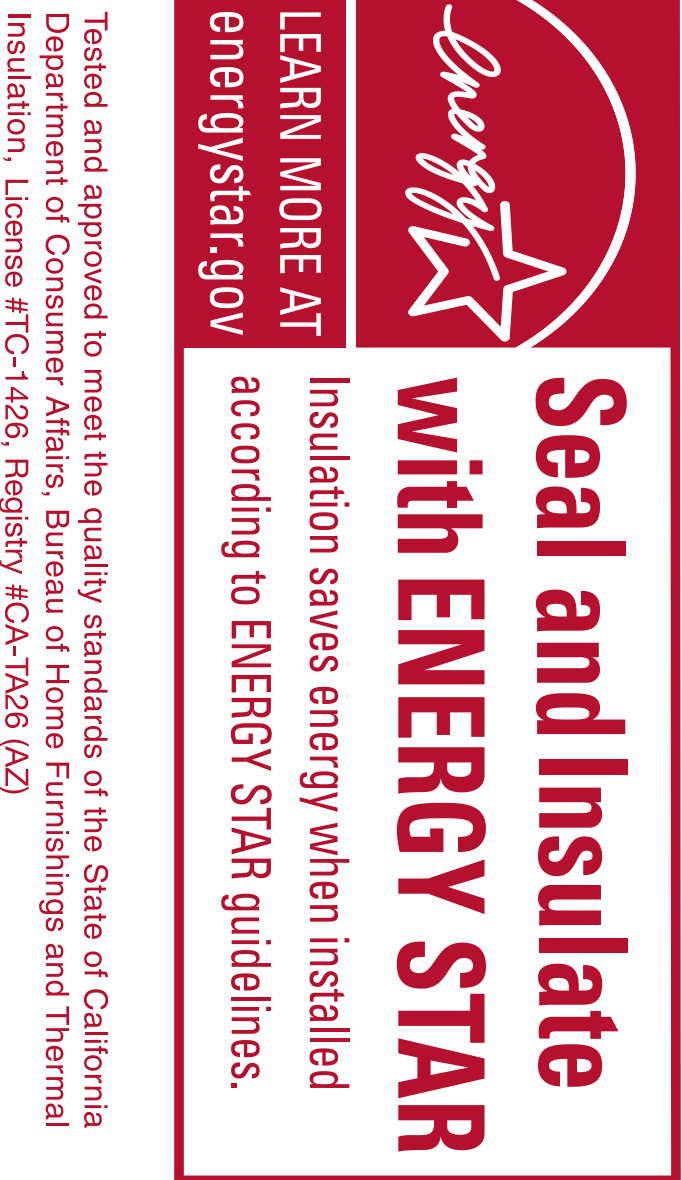

EPA EST. No. 72787-MI-001
EPA EST. No. 73840-KT-001
EPA EST. No. 73583-LA-001
EPA EST. No. 73583-LA-001
EPA EST. No. 73583-LA-001
EPA EST. No. 73583-LA-001
EPA EST. No. 73583-LA-001
EPA EST. No. 73583-LA-001
EPA EST. No. 73583-LA-001
EPA EST. No. 73583-LA-001



Thermal, Acoustical, and Pest Control Insulation

ACTIVE INGREDIENT:
Orthoboric acid..... 12.5%
OTHER INGREDIENTS:..... 87.5%
TOTAL.....100.0%

INSULATION MADE FROM RECYCLED PAPER

- Helps protect your home environment from annoying listed insects and other arthropods*
- Contains 87% recycled paper
- Helps keep you warm in winter & cool in summer
- Fire resistant
- Highly resistant to air infiltration
- Helps deaden sound as an acoustical barrier
- This clean-blowing insulation is the result of a patented process.

FOR USE IN NEW CONSTRUCTION AND RETROFIT APPLICATIONS
ATTICS • FLOORS • WALLS • CRAWLSPACES • OVERLAY FIBER GLASS OR OTHER INSULATIONS
HOMES • APARTMENTS & CONDOMINIUMS • OFFICES & INDUSTRIAL BUILDINGS
HOTELS & MOTELS • HOSPITALS & NURSING HOMES • RESTAURANTS • SCHOOLS

KEEP OUT OF REACH OF CHILDREN
CAUTION

FIRST AID
IF ON SKIN OR CLOTHING: <ul style="list-style-type: none">• Take off contaminated clothing.• Rinse skin immediately with plenty of water for 15-20 minutes.• Call a poison control center or doctor for treatment advice.
IF IN EYES: <ul style="list-style-type: none">• Hold eye open and rinse slowly and gently with water for 15-20 minutes.• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing.• Call a poison control center or doctor for treatment advice.
Have the product container or label with you when calling a Poison Control Center or doctor, or when going for treatment.

PRECAUTIONARY STATEMENTS: HAZARDS TO HUMANS AND DOMESTIC ANIMALS
CAUTION. Harmful if absorbed through skin. Causes moderate eye irritation. Avoid contact with eyes, skin or clothing. Wash thoroughly with soap and water after handling.

PERSONAL PROTECTIVE EQUIPMENT (PPE)
Applicators, mixers, and other handlers must wear:

- long-sleeved shirt
- chemical-resistant gloves
- long pants
- NIOSH-approved particulate filtering facepiece respirator with any N, R, or P filter
- dust goggles
- socks, shoes

READY-TO-USE T•A•P® Thermal, Acoustical, and Pest Control Insulation is an insect/arthropod control insulation. This product is toxic to listed insects and other arthropods and is intended to prevent their infestations in those building voids (attic, wall, between-floors, crawlspace) where the product is applied. Its toxic effect begins only after insect/arthropod contact with product.

KILLS: Cockroaches, Termites (including Formosan Termites), Ants, Silverfish, Earwigs, Crickets, Sowbugs, Darkling Beetles, Millipedes, Centipedes, Booklice, Firebrats, Dermestids, Lady Beetles, Boxelder Bugs, Stink Bugs, Kudzu Bugs, Bat Bugs, Pillbugs, Snails, and Slugs.

This insulation contains material toxic to these insects/arthropods and is intended to prevent new infestations in walls and attics where the product is applied. Control of insects/arthropods is limited to contact with insulation.

*Effective against listed organisms



EPA REG. NO. 89140-1
US PATENT NO. 6,578,782

CLASS 1 or CLASS A BUILDING
MATERIAL DETERMINED BY ASTM E 84
FOR SMOKE DEVELOPED INDEX LESS
THAN 450. MEETS ASTM C 739 AND ALL
FHA, VA AND HUD BUILDING CODE
REQUIREMENTS.

Manufactured For: Pest Control Insulation LLC
5285 Mountain Center Plaza • Lula, GA 30554



46"

T•A•P PEST CONTROL INSULATION COVERAGE CHART (WALLS)					
BAG WEIGHT: 30LBS					
Dry Dense Pack Wall Applications					
Wall	Thermal Resistance	Installed Thickness	Minimum Wt. Per Square Foot		Maximum Coverage per Bag (Sq Ft)
			Inches	Lb/sq Ft	
2x4	13	3.5	1.02	32.0	31.3
2x6	21	5.5	1.60	20.0	19.5

This wall coverage chart is for dry applications only and is based on a minimum installed density of 3.55 lbs./cf.

T•A•P PEST CONTROL INSULATION COVERAGE CHART (ATTICS) BAG WEIGHT: 30LBS									
Initial R-Value @ 75°F	Minimum Installed Thickness (in.)	Settled Thickness (in.)	Bags/1,000 Sq. Ft.		Bags/1,000 Sq. Ft.		Bags/1,000 Sq. Ft.		Net Coverage Sq. Ft./Bag
			2"x6" Joists 16" On Ctr.	2"x6" Joists 24" On Ctr.	2"x6" Joists 16" On Ctr.	2"x6" Joists 24" On Ctr.	2"x6" Joists 16" On Ctr.	2"x6" Joists 24" On Ctr.	
11	3.4	3.1	13.1	12.2	13.1	12.2	13.1	12.2	76.5
12	3.7	3.4	12.2	11.3	12.2	11.3	12.2	11.3	69.7
13	4.0	3.7	11.3	10.4	11.3	10.4	11.3	10.4	63.0
14	4.3	4.0	10.4	9.5	10.4	9.5	10.4	9.5	56.2
15	4.6	4.3	9.5	8.6	9.5	8.6	9.5	8.6	49.4
16	4.9	4.6	8.6	7.7	8.6	7.7	8.6	7.7	42.6
17	5.2	4.9	7.7	6.8	7.7	6.8	7.7	6.8	35.8
18	5.5	5.2	6.8	5.9	6.8	5.9	6.8	5.9	29.0
19	5.8	5.5	5.9	5.0	5.9	5.0	5.9	5.0	22.2
20	6.1	5.8	5.0	4.1	5.0	4.1	5.0	4.1	15.4
21	6.4	6.1	4.1	3.2	4.1	3.2	4.1	3.2	8.6
22	6.7	6.4	3.2	2.3	3.2	2.3	3.2	2.3	1.8
23	7.0	6.7	2.3	1.4	2.3	1.4	2.3	1.4	0.9
24	7.3	7.0	1.4	0.5	1.4	0.5	1.4	0.5	0.0

The listed values above are based on attics insulated and can be obtained only by an insulation applicator using equipment supplied by the manufacturer and specifically designed for the product and application techniques. R-Values (R-19 when framing is 2x6 @ 16" O.C. Min Net Wt 27.5 LBS)

DIRECTIONS FOR USE

It is a violation of Federal law to apply this product in a manner inconsistent with its labeling. "R" means resistance to heat flow. The higher the R-value the greater the insulating power. To get the marked R-value, it is essential that this insulation be installed properly. Insulation applicators installing this material should be familiar with and carefully follow installation instructions from the manufacturer.

NOT FOR USE AS SOLE PROTECTION AGAINST TERMITES. Use of this product does not substitute for pre- and/or post-construction mechanical alteration, soil treatment or foundation treatment. For active termite infestations, you should consult a licensed pest control operator.

EASY AS 1 • 2 • 3

1. Attic Preparation
 - Maintain attic ventilation. Insulation should not cover any attic ventilation. Use baffles or vent chutes. Do not cover soffit vents.
 - Insulation should not cover or touch heat producing components like light fixtures. Create barriers to maintain a 3" clearance.
 - Create a barrier around your attic access to keep the insulation in place when entering or exiting the attic.


FOLLOW INSTRUCTIONS FOR SET UP AND OPERATION OF BLOWING MACHINE

1. Position Blowing Machine outside house. Plug in and attach 100' hose.
2. Run hose to attic through nearest access. Avoid tight turns.
3. Blow insulation into attic or on top of existing insulation to desired thickness/R-Value.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.
Pesticide Storage: Store product in a dry area.
Pesticide Disposal: Waste resulting from the use of this product must be disposed of on site or at an approved waste disposal facility.
Container Handling: Nonrefillable container. Do not reuse or refill this container. Completely empty bag into application equipment, then offer for recycling if available or dispose of empty bag in a trash can or by incineration.

5285 Mountain Center Plaza • Lula, GA 30554 770.766.6050

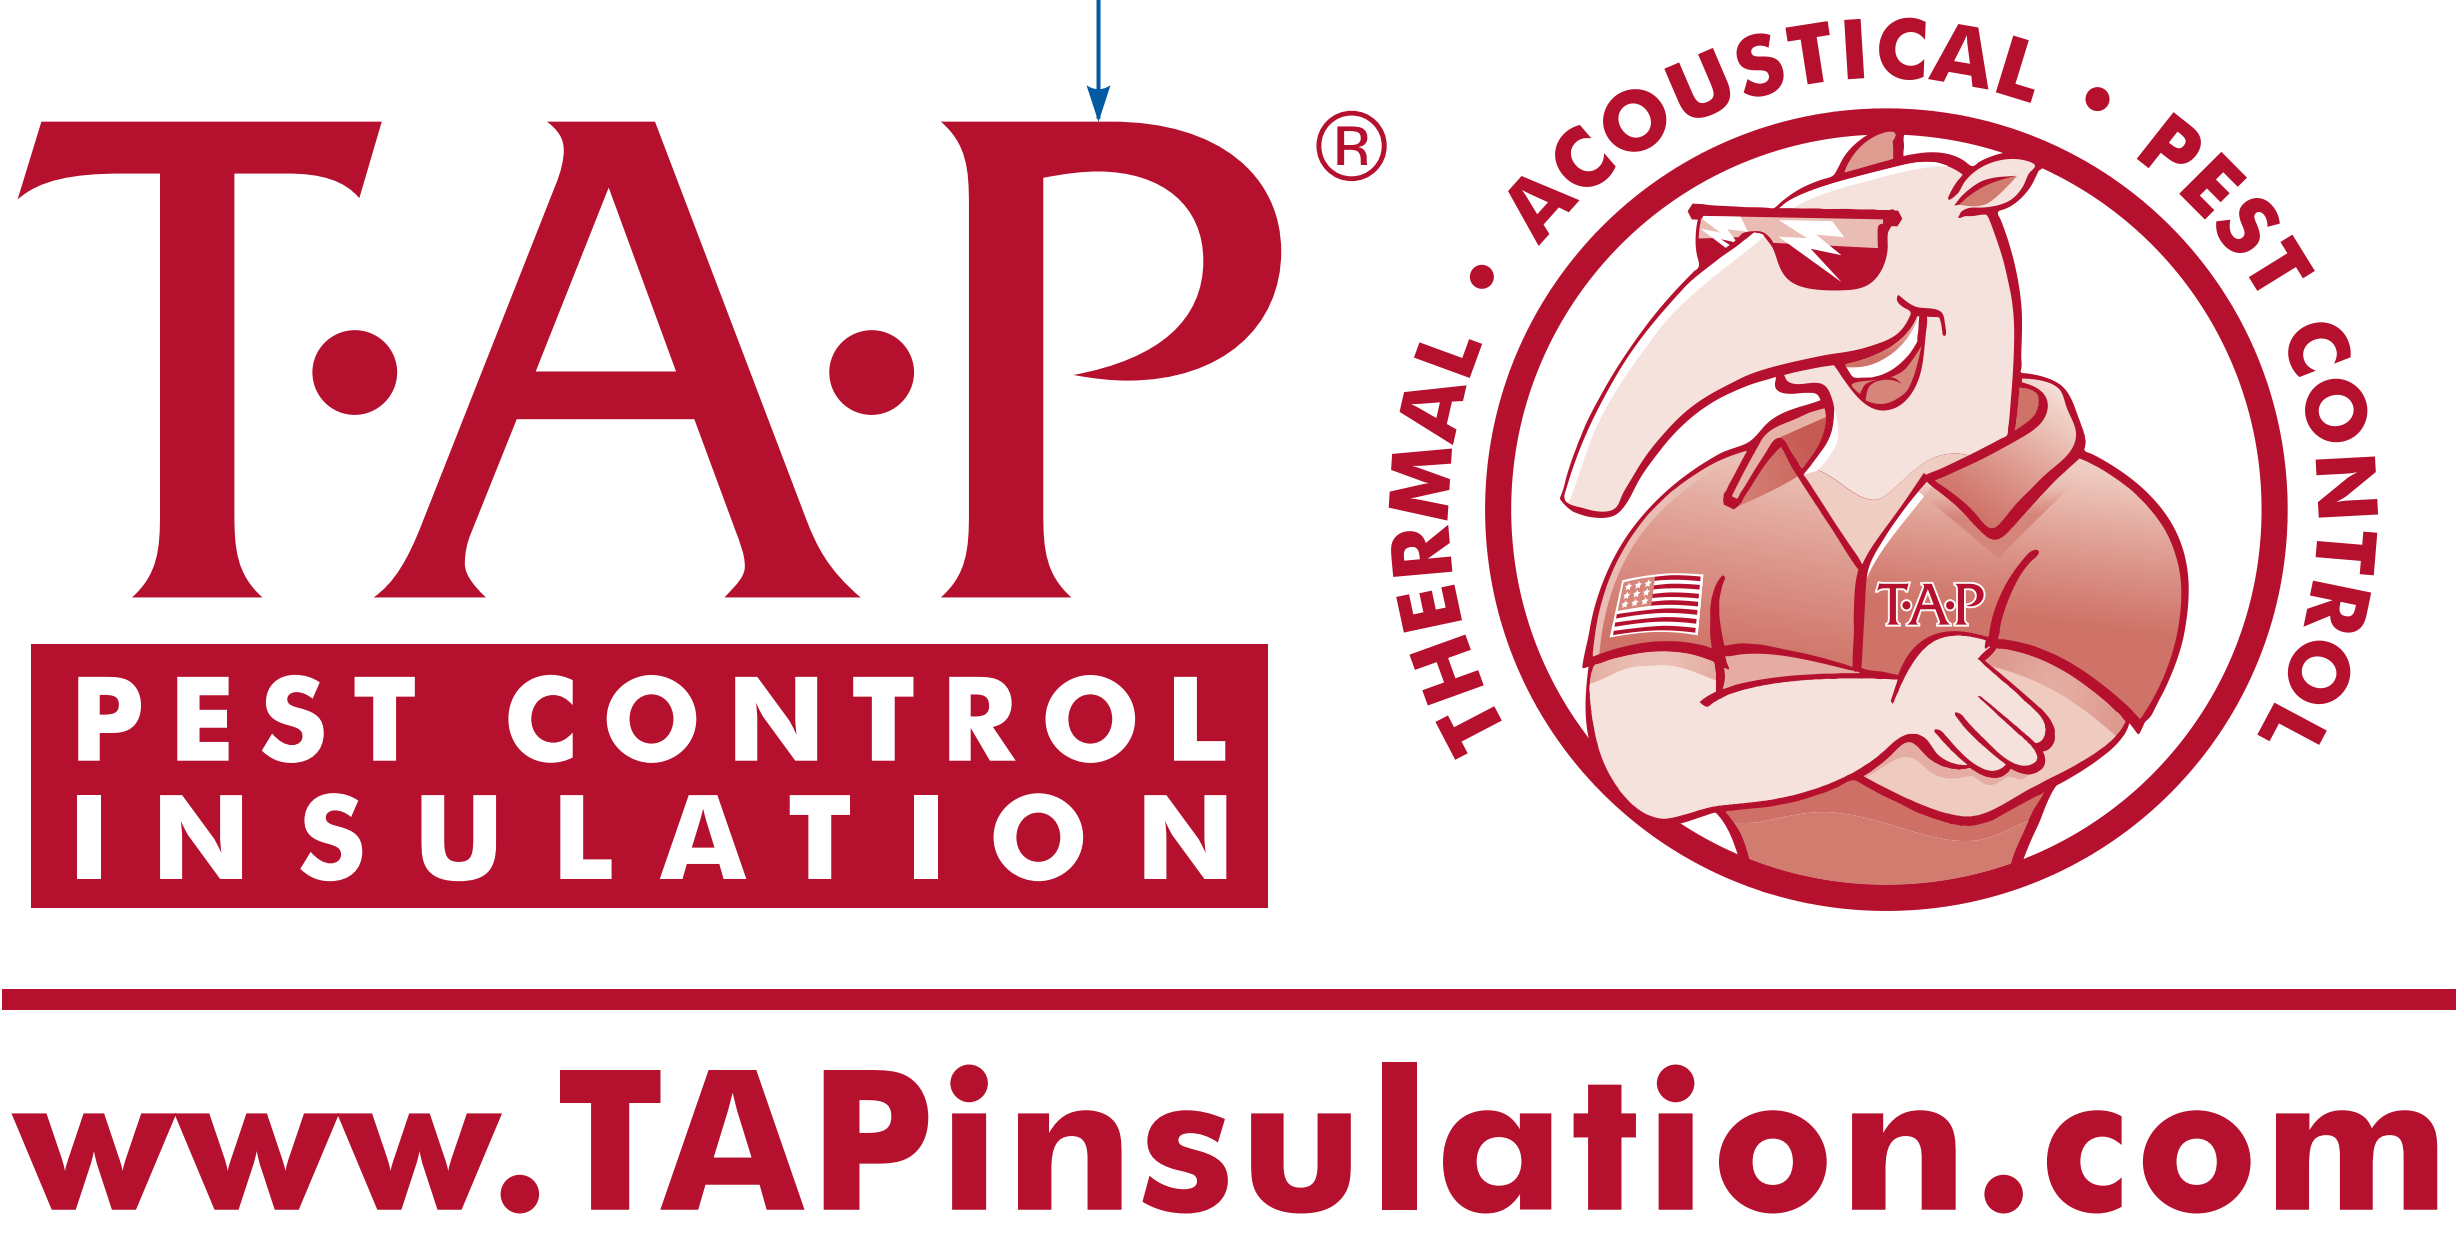

9.75"

(Cut out & Staple in Attic)

ATTIC CARD
STATEMENT OF COMPLIANCE
FOR LOOSE FILL INSULATION

THIS INSULATION HAS BEEN INSTALLED IN CONFORMANCE WITH THE ABOVE RECOMMENDATIONS TO PROVIDE A VALUE OF R-____ USING ____ BAGS OF INSULATION TO COVER ____ SQUARE FEET OF AREA.

Builder's Signature _____ Company Name _____ Date _____
Installer's Name _____ Company Name _____ Date _____

